

WUNDER-COVER


WC6060DS - SINGLE LID WUNDER-COVER

The WC6060DS is our most popular recessed infill access cover. The galvanised steel frame and removable tray accept pavers, tiles, cobblestones, concrete, or landscaping materials - making manholes and utility access points virtually invisible while maintaining full access for maintenance.

KEY FEATURES

- **NZ Made**
Manufactured locally with custom sizing available
- **Trafficable**
Load rating tested to 25 tonnes
- **Hot-Dipped Galvanised**
Stainless steel also available
- **Lightweight**
Only 31.68kg pre-installation
- **Easy Installation**
Simple 4-step process with standard tools
- **Versatile Surfaces**
Infill to match the surrounding surface
- **Neoprene Seal**
Keep gases in and unwanted material out
- **Easy Removal**
Tilt-and-slide operation using standard lifting keys

TECHNICAL DRAWING

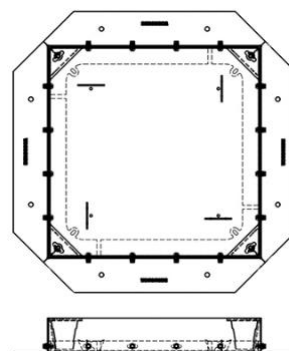

Extended technical drawings with measurements on page 2

STOCKED SINGLE-LID WUNDER-COVERS

WC4545AS	450 × 450 × 100mm
WC6060DS	600 × 600 × 100mm
WC7070DS	700 × 700 × 100mm

Custom sizes to order on request

TECHNICAL SPECIFICATIONS

Product Code:	WC6060DS
Seal:	Compressible neoprene
Material:	Hot-dipped galvanised steel
Alt. Material:	316 Stainless steel
Standard Depth:	100mm (custom available on request)
Load Rating:	Trafficable
Lid Weight:	13.87kg (empty)
Total Weight	31.68kg (lid + frame)
Removal:	Standard lifting keys using a tilt-slide operation
Shipping Dimensions:	800 × 800 × 100mm

INSTALLATION NOTES

- All work must be completed in a tradesman-like manner
- Frame must be fully supported including internal flanges and gussets
- Set frame to desired level, oriented to suit paver pattern or surrounding surface
- Plaster all gaps; leave sufficient depth for pavers over external flanges
- Tiles/asphalt can be set with partial concrete fill for added stability
- Contact us for advice on unusually heavy loads or custom applications

